

Facade

Product description



Profiled sheet T15-115-1134

Low-profile corrugated sheets have trapezoidal or sinusoidal profiles. In facades, corrugated sheets are mainly used as the exterior structure. Using them creates a tranquil and clear façade.

Product applications

- residential construction
- office construction
- public construction
- industrial construction
- renovation construction
- agricultural construction
- warehouse construction

Ruukki is a metal expert you can rely on all the way, whenever you need metal based materials, components, systems or total solutions. We constantly develop our product range and operating models to match your needs.

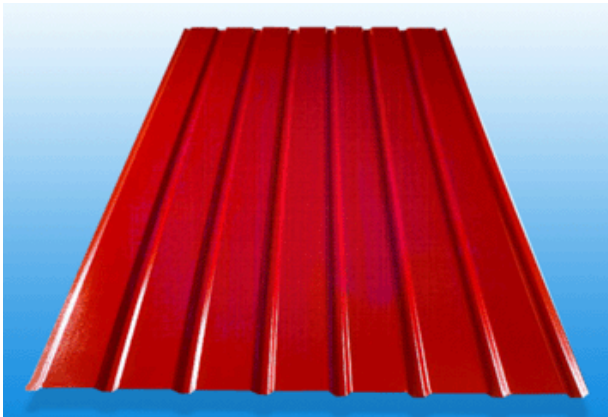

● **Product**

Name	Profiled sheet T15-115-1134
Height	13 mm
Effective width	1134 mm
Maximum length	10000 mm
Minimum length	600 mm
Thickness (mm)	Weight (kg/m ²)
0.45	3,9
0.50	4,3
0.60	5,2
0.70	6,0

● **Material**

Hot galvanized steel sheet	SFS-EN 10326
Coated steel flat products	SFS-EN 10169-1 SFS-EN 10169-2

● **Tolerances**

Product	SFS-EN 508-1
Material	SFS-EN 10143

● **Coatings**

Galvanized	Minimum zinc amount 275 g/m ²
Coated	Minimum zinc amount 275 g/m ²
Colours	According to colour chart

Typical coatings	Thickness (mm)
Polyester	0.45
Polyester matt	0.50
Pural	0.50 / 0.60 / 0.70
PVDF	0.50 / 0.60 / 0.70
Galvanised	0.45 / 0.60 / 0.70

Check availability and delivery times for other coatings and colours from sales.

● **Contact information**

Sales Tel. +358 (0)20 59 127 Fax +358 (0)20 592 7700

Rautaruukki Oyj

www.ruukki.com

The information given on this data sheet has been carefully checked. Rautaruukki Corporation does not, however, assume any responsibility for errors or omissions, or any direct or indirect damage caused by incorrect application of the information. Right to changes reserved.

Copyright © 2008 Rautaruukki Corporation. All rights reserved.

Ruukki is a trademark of Rautaruukki Corporation. More With Metals and Rautaruukki are registered trademarks of Rautaruukki Corporation.