


# **RUUKKI DAKPROFIEL T20**

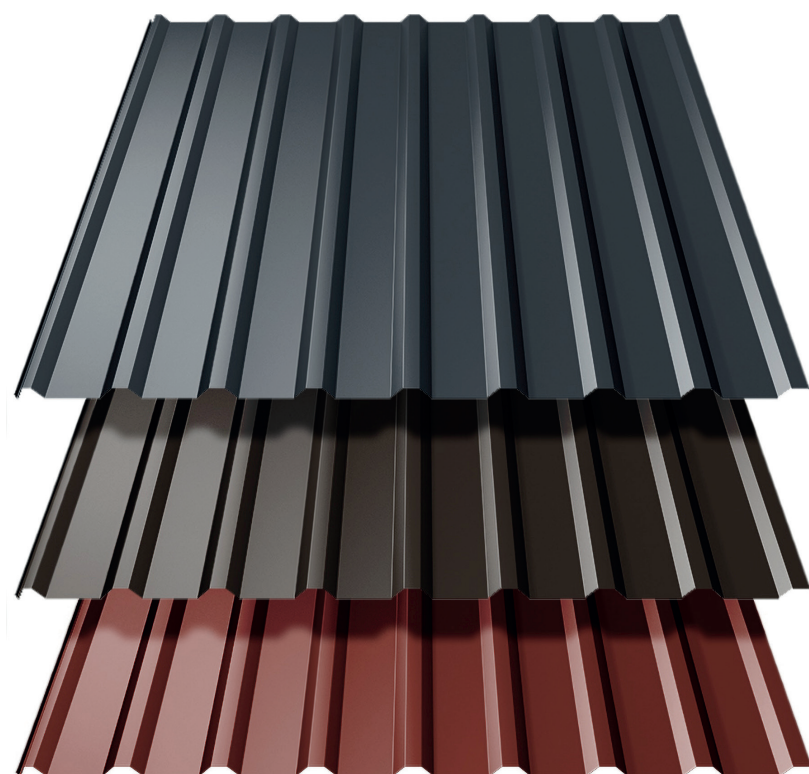

## Technische specificaties

**Naam:** T20-29W-1095

**Bruikbare breedte:** 1095 mm

**Totale breedte:** 1129 mm

**Totale hoogte:** 18 mm



**Maximale lengte:** 8,00 m

**Minimale lengte:** 0,60 m


**Staaldikte:** 0,50 mm – 4,5 kg/m<sup>2</sup>

**Minimale helling:** 6°


**Massa zink:** 275 g/m<sup>2</sup>

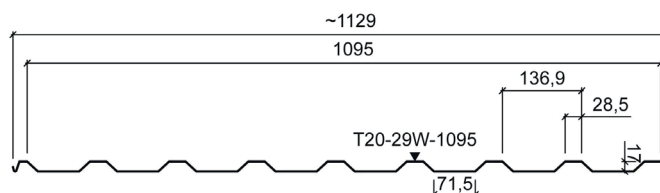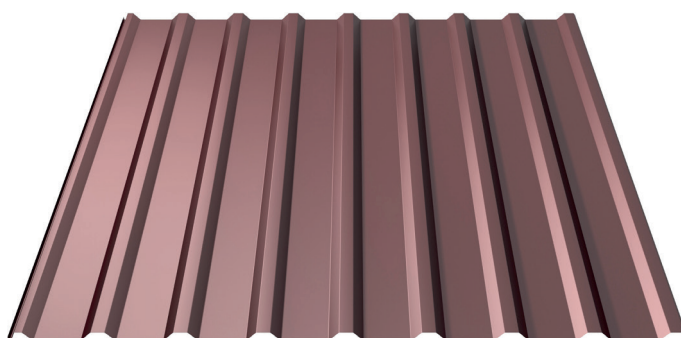


## Kleuren

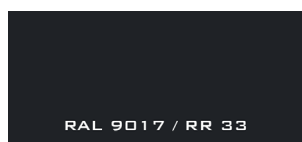

**Zwart**

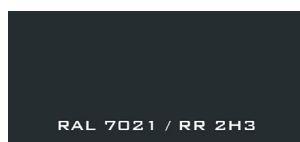

**Antraciet**

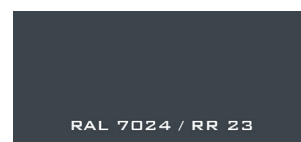

**Grijs**



**Bruin**



**Terra-cotta**



**Rod**



**Chocoladebruin**



**Blank Alu**



**Wit**

## Coating

|                       |                                    |
|-----------------------|------------------------------------|
| <b>Ruukki 50 plus</b> | GreenCoat Pural BT / Pural Matt BT |
| <b>Ruukki 40</b>      | GreenCoat Crown BT                 |
| <b>Ruukki 30</b>      | Polyester Rough Matt / Polyester   |

| Technische garantie | Esthetische garantie |
|---------------------|----------------------|
| 50 jaar             | 25 jaar              |
| 40 jaar             | 15 jaar              |
| 30 jaar             | 10 jaar              |

## Anti-condens

Anti-condensatie vilt aan de binnenkant gelijmd.

**Gewicht per oppervlakte-eenheid :** 110 g/m<sup>2</sup>

**Mogelijke waterabsorptie :** > 600 g/m<sup>2</sup>

**Fleece teruggesneden :** Geen

Volg de installatierichtlijnen.